

LED Work Light


CWF



CE (DC model)	RoHS 10	UL	FCC	IP20	Indoor Use	All Mounting Directions	Ambient Temperature -25°C~+60°C (DC model)	Ambient Temperature -20°C~+50°C (AC model)	Daylight
------------------	------------	----	-----	------	---------------	-------------------------------	---	---	----------

Model Number Configuration

CWF3S-24-CD



① Length 3 = 300mm 6 = 600mm 9 = 900mm*1	② Rated Voltage / Standards 24 = 24V DC / UL, CE*2 M2U = 100-240V AC / UL*3	③ Luminous Color CD = Daylight
---	---	-----------------------------------

*1. AC Type Only
*2. CWF-3S/6S Type Only
*3. 100-240V AC range is only Available in North America

Specification

Description	Voltage Type	Length		
		300mm	600mm	900mm
Illuminance (@1m, center, typical)	DC	165lx	320lx	-
	AC	150lx	320lx	445lx

Product List

Model Number	Rated Voltage	Luminous Color	Power Consumption	Mass
CWF3S-24-CD	24V DC	Daylight	5W	0.42kg
CWF6S-24-CD	24V DC	Daylight	10W	0.57kg
CWF3S-M2U-CD	100-240V AC	Daylight	5W	0.53kg
CWF6S-M2U-CD	100-240V AC	Daylight	10W	0.68kg
CWF9S-M2U-CD	100-240V AC	Daylight	15W	0.84kg

Brackets

Standard Mounting Bracket



* Mounting screws not included.
Recommended Torque : 1.5Nm

Optional Magnetic Mounting Bracket



* Accessory Bracket Screw 2pcs included

Optional Swivel Bracket

CWF-001




Adjustment Angle 130°




* Accessory Bracket Screw 2pcs included. Mounting screws not included.

Dimensions (mm)


LED Work Light



CWF Standard Mounting Bracket (2 pcs)

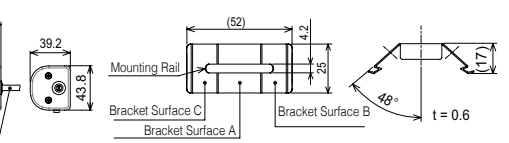


Model Number	Dimension A	Dimension B
CWF3S-□-CD	300	260
CWF6S-□-CD	600	560
CWF9S-□-CD	900	860

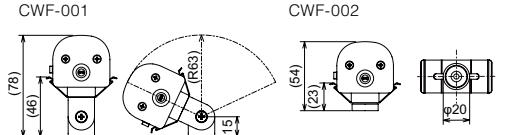


Features

User-Friendly Operation

Rocker Switch



Simple Installation



Illuminance Distribution Chart (lx)

